

HIGH PRESSURE SELF-PRIMING PUMP



HP-30

DESCRIPTION

- * This high pressure pump is powered by gasoline engine or diesel engine.
- * High output and high pressure pump.
- * Maximum capacity of 40m³/h.
- * Maximum head of 80m.
- * Maximum pressure of 116psi.
- * 80mm (3") suction and discharge ports.
- * Cast iron pump body.


APPLICATIONS

- Irrigation of paddy field.
- Sprinkling water for orchard plant.
- Water supply to or water drainage of fish farm.
- Water supply to water storage tank.
- Washing of barn, sty, hen house.
- Washing of agricultural equipment.
- For fire fighting.

SPECIFICATION DATA

| | | |
|----------------|---------------------|-------|
| Model | | HP-30 |
| Inlet / Outlet | (mm) | 80 |
| Speed | (rpm) | 3600 |
| Max. Capacity | (m ³ /h) | 40 |
| Max. Head | (m) | 80 |
| Max. Pressure | (psi) | 116 |
| Suction Lift | (m) | 7 |
| Required Power | (hp) | 13 |
| Net Weight | (kg) | 11 |

PERFORMANCE CURVE

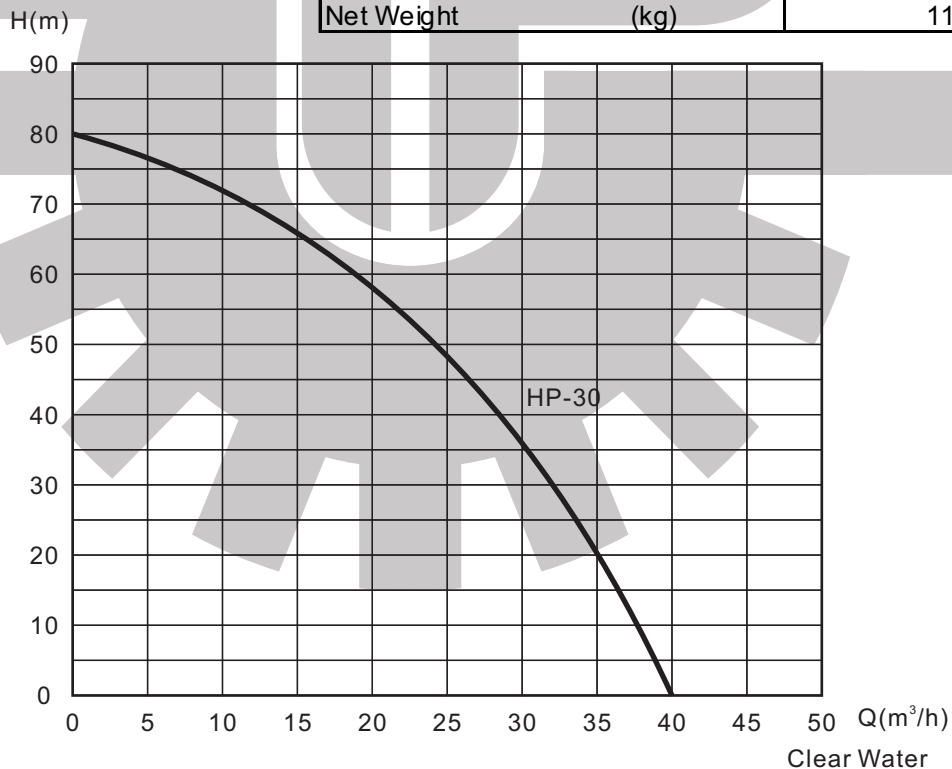


THONG FATT JAYA MACHINERY HARDWARE SDN. BHD.

同發機械五金有限公司 (176024-V)

775-779, Jalan Kuala Kangsar, Taman Tasek Jaya,
31400 Ipoh, Perak, Malaysia.
Tel: 00-605-5468 659, 5458 751, 5479 196, 5458 107
Fax: 00-605-5482 282, 5474 753
Email: sales@thongfattjaya.com.my
Website: http://www.thongfattjaya.com.my

HIGH PRESSURE SELF-PRIMING PUMP

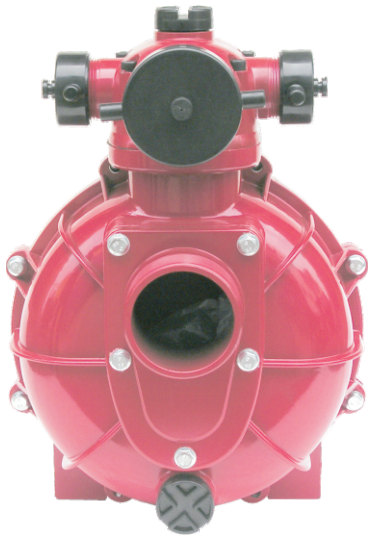

HP-30

OVERALL DIMENSION

