




High Pressure Fire Fighting Pump (WITH DOUBLE IMPELLER)

Specification Data

PUMP	MODEL	ASP 32-200C x 2
	Inlet/Outlet Dia. (inch)	1 1/2" x 1 1/4"
	Max. Head (m)	107
	Max. Capacity (L/min.)	250
	Suction Head (m)	6
ENGINE	MODEL	DEK F300
	Type	4-stroke, single cylinder diesel engine
	Displacement (ml)	296
	Max. Output (hp/rpm)	6.7 / 3600
	Start Mode	Recoil & electric start
	Fuel Tank Capacity (L)	3.5
	Fuel Continuous Time (hr)	2.5
	Total Weight (kg)	68



Performance Curve

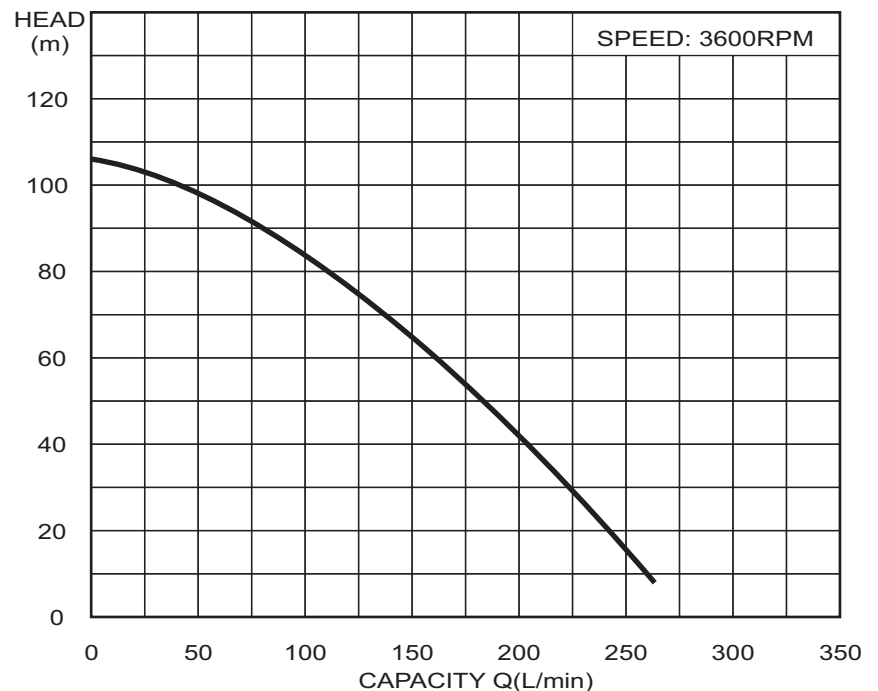

Material

- Cast iron
- Bronze impeller
- Stainless steel shaft



THONG FATT JAYA MACHINERY HARDWARE SDN. BHD.

同發機械五金有限公司 (176024-V)

775-779, Jalan Kuala Kangsar, Taman Tasek Jaya,
31400 Ipoh, Perak, Malaysia.
Tel: 00-605-5468 659, 5455 751, 5479 196, 5454 107
Fax: 00-605-5482 282, 5474 753
Email: tfjaya@tm.net.my / tfjaya@streamyx.com
Website: <http://www.thongfattjaya.com.my>